RHEEM 27 CONTINUOUS FLOW WATER HEATER





















FEATURES

- 6.1 Star energy efficiency good for the environment, and saves on energy costs
- 27 Litre/minute⁴ continuous hot water delivery - ideal for families and large homes
- **Solar ready** Rheem 70°C capable models are compatible with solar systems without the need for special fittings^{2,5}
- Reduced water wastage reduced flow during start-up
- Remote Temperature Controller options for added convenience and safety
- 50°C models available, requiring no tempering valve²
- 10 Year Warranty¹


WHY CHOOSE FROM THE RHEEM CONTINUOUS FLOW HOT WATER RANGE?

- Never runs out of hot water
- Range of deliveries from 12 27 Litres/minute^{3,4}
- Ability to deliver up to 54L/minute⁴ by linking two units with the Rheem EZ Link[®] system
- Flamesafe® overheat protection
- Digital display for easy fault diagnosis and service
- Frost protected down to -20°C
- Compact size models, perfect for any location
 with limited space
- Full technical support through Rheem's National Service Network
- Available to suit Natural Gas or Propane

CONTINUOUS FLOW HOT WATER WHEN YOU NEED IT

Continuous Flow water heaters deliver hot water that never runs out because they heat water when you need it, for as long as you need it. They work differently to traditional storage water heaters, only heating on demand rather than heating and storing water until needed. Up to 7 Star equivalent energy efficient, Rheem Continuous Flow water heaters are good for the environment and they mount conveniently to the wall, taking up less space.

With a wide range of deliveries, there is a Rheem Continuous Flow model for every budget and family.

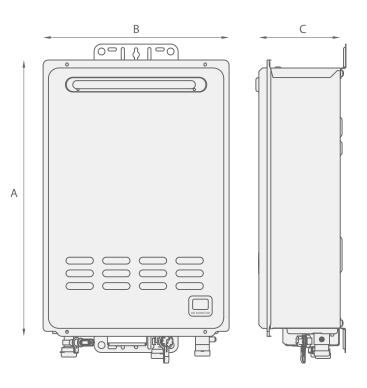

MODEL	RHEEM 27 CONTINUOUS FLOW
	OUTDOOR
	876627NF/PF 874627NF/PF
	Natural Gas/ Propane
Temperature (°C)	50 60
Gas Energy Rating	6.1 Stars
Flow Rate	27L/min
(L/min at 25°C rise)	27 1/1111
Minimum Operating	2.0L/min
Flow rate	
Nominal Gas Consumption	205 MJ/hr
Dimensions (mm)	
Height A	600
Width B	350
Depth C	215
Approx Weight (kg)	24
Max. Water Supply Pressure	1000kPa
Min. Water Supply Pressure	140kPa
Cold Water Connection	R ¾/20
Hot Water Connection	R ¾/20
Gas Connection	R ¾/20
Accessories	
Pipe Cover	299830
Recess Box	299831
Security Wall Mounting	299868
Security Cage	299867
Temp. Controllers	
Kitchen	299850
Bathroom 1	299851
Bathroom 2	299852
Deluxe Temp. Controllers	
Kitchen	299858
Bathroom 1	299859
Bathroom 2	299860

- ¹ Continuous Flow Warranty:
- 10 Years parts and 3 Years labour on Heat Exchanger, 3 Years parts & labour on other components, when installed in a domestic dwelling. For all other installations, the warranty period is 1 Year parts and labour on Heat Exchanger and other components. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty.
- ² 60°C and higher temperature models and some applications require a tempering valve in accordance with AS/NZS 3500.4.
- ³ For details of models refer to Rheem Continuous Flow Gas Hot water brochure.
- ⁴ At 25°C temperature rise.
- ⁵ Applies to 70°C capable models when set to 70°C. Information and product data current as at 31/05/2012. Materials and data are subject to change without notice.
- [®] Registered Trademark of Rheem Australia Pty Ltd.
- ™ Trademark of SAI Global



Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia PO Box 6, Rydalmere, New South Wales 2116, Australia.

INSTALL A