

**“You’re always in hot water with AquaMAX”**



“The advantages the new AquaMAX models have over other gas storage water heaters demonstrates significant improvement in gas water heater development”



## STAR PERFORMERS FROM AQUAMAX

With our new release Five Star performers you'll always have hot water when you need it. Our stainless steel and vitreous enamel cylinders outperform any domestic storage hot water system in the market and come complete with a 5 year (vitreous) or 10 year (stainless steel) cylinder warranty.<sup>1</sup>

Our flagship model AquaMAX 390 has a massive 390 litres available in the first hour and with 185 litre per hour recovery,<sup>2</sup> you're unlikely to ever run out of hot water.



### ENERGY EFFICIENT

AquaMAX Gas Water Heaters operate at over 85% thermal efficiency. As a result, AquaMAX Gas Water Heaters create significantly less greenhouse emissions, and deliver considerable savings with reduced gas consumption over the life of the unit.<sup>3</sup>

### STAINLESS STEEL, BUILT TO LAST

Constructed from stainless steel, the AquaMAX cylinder and heat exchanger can resist corrosion for a substantially longer period than conventional cylinders and heat exchangers. The AquaMAX Stainless Steel range also have no need for sacrificial anodes.



### AQUAMAX 270 VE Five Star efficiency in a vitreous cylinder

The only vitreous enamel water heater of its type with a five star energy rating, the AquaMAX 270 VE gas storage water heater offers water saving advantages whilst using the least amount of gas possible.



### AQUAMAX 270 SS Stainless Steel in a compact package

At last, a compact water heater with a stainless steel tank! Boasting a five star energy rating, the AquaMAX 270 SS gas storage water heater offers big savings and high efficiency gas burner technology.



### AQUAMAX 340 SS Perfect hot water for new homes

The AquaMAX 340, five star energy rated water heater has all the features of the 390, with the exception of the mixing valve.

Specifically designed for installation where an approved tempering valve is to be fitted to prevent scalding.



### AQUAMAX 390 SS Largest delivery, you choose the mix

The AquaMAX 390 patented in-built mixing valve gives you 390 litres first hour delivery with a five star energy rating.

The 390's mixing valve adds a controlled mix of cold water, giving up to 205 litres of 60°C<sup>2</sup> hot water delivery in the initial draw, with 185 litres of recovery per hour after that




As an installation option on the 390, your plumber can install twin temperature delivery. This will give you greater flexibility so you can enjoy the convenience of 65°C<sup>2</sup> hot water in the kitchen and laundry when you need it, while taking comfort in the knowledge that it is safer for kids with bathroom hot water taps at 50°C<sup>2</sup> or lower.

Variable water volume Control A	Thermostat Valve Control B	Approximate delivered water temp °C	Single Draw Delivery Litres (approx.)
		50°C	250
		60°C	205
		65°C	175
		75°C	145

Note: The above values are to be used as a guide only. They are based on a cold water inlet temperature of 15°C.

## SPECIFICATIONS

	390 SS AQUAMAX (WITH MIX)	340 SS AQUAMAX (WITHOUT MIX)	270 SS AQUAMAX	270 VE AQUAMAX
Cat. No.	AQUAMAX 390	AQUAMAX 340	AQUAMAX 270 SS	AQUAMAX 270 VE
Gas type	Natural	Natural	Natural	Natural
Tank capacity	155 Litres	155 Litres	130 litres	135 litres
Nominal gas consumption	40 MJ/Hr	40 MJ/Hr	33 MJ/Hr	30 MJ/Hr
AGA Star Rating Index	5 stars	5 stars	5 Stars	5 Stars
Recovery rate at 45°C rise	185 Litres/Hr <sup>2</sup>	185 Litres/Hr <sup>2</sup>	145 L/Hr @ 45°C	135 L/Hr @ 45°C
Installation type	External only	External only	External only	External only
Pressure & temperature relief valve setting	1400 kPa/99°C	1400 kPa/99°C	1400 kPa/99°C	1400 kPa/99°C
Max. water supply pressure	1100 kPa	1100 kPa	1100 kPa	1100 kPa
Tank material	stainless steel	stainless steel	stainless steel	vitreous enamel lined
Water inlet connection	Rp 3/4" female	Rp 3/4" female	Rp 3/4" female	Rp 3/4" female
Water outlet connection	Rp 3/4" female	Rp 1/2" female	Rp 1/2" female	Rp 3/4" female
Gas connection	1/2" flared compression	1/2" flared compression	1/2" flared compression	1/2" flared compression
Warranty	10 years (on cylinder)	10 years (on cylinder)	10 years (on cylinder)	5 years (on cylinder)
WaterMark licence number	WMKA00200	WMKA00200	WMKA00200	WMKA00200
Overall height	1635 mm	1635 mm	1410mm	1410mm
Width (approx.)	520 mm	520 mm	475mm	475mm
Depth (approx.)	610 mm	610 mm	545mm	545mm
AGA approval number	6114	6114	7477	6705
Weight empty (approx.)	65 kg	65 kg	46kg	65kg

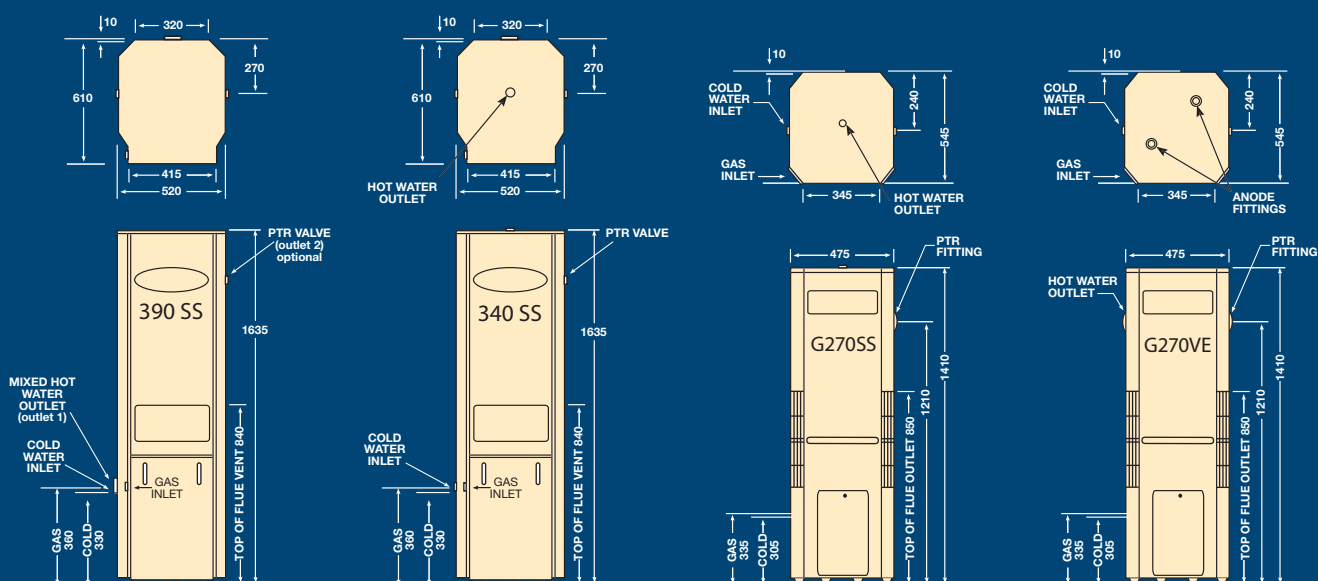

1 Full Warranty conditions available on request from AquaMAX Australia Pty Ltd. Call Toll Free 1800 676 000  
 2 Based on an inlet water temperature of 15°C  
 3 When compared to standard 3 star gas storage water heaters