









OUR STAINLESS SOLAR SYSTEM **USES LESS ENERGY, SAVES YOU MONEY** AND IS ENVIRONMENTALLY FRIENDLY


Over 50 years experience in bringing hot water to the world, has enabled the development of advanced technology solar hot water systems.

A Beasley Model 26S solar hot water system can provide you with piping hot water for your every day needs, and most importantly you can save as much as 95% (depending on your location) on the electricity cost, because Beasley heaters use less energy, resulting in a more environmentally friendly product.

QUALITY MATERIALS AND WORKMANSHIP FOR LONG, LONG LIFE.

Every component, every weld and joint is inspected and pressure tested meticulously, before shipment from the factory.

The heavy duty **stainless** steel storage tank on Model 26S carries a six year warranty, while our solar panels are guaranteed for seven years. Full details are given on warranty certificate.

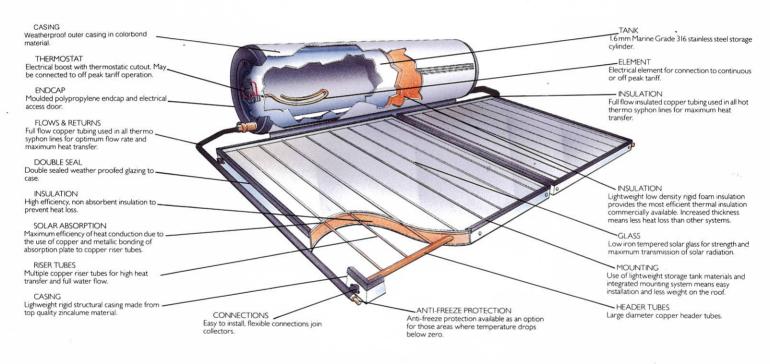



DESIGNED AND MANUFACTURED IN AUSTRALIA EXPORT ENQUIRIES TO:

BEASLEY INDUSTRIES PTY, LTD.

Devon Park, S.A. 5008 Telephone: (08) 340 2299 International: 618 340 2299 A.C.N. 007 599 304 Fax: (08) 340 0829 International: 618 340 0829

26S (Stainless steel tank)

SPECIFICATIONS:	26S 160 litre		26S 300 litre		26S 440 litre		26S 600 litre		
	U.S.	Metric	U.S.	Metric	U.S.	Metric	U.S.	Metric	
Tank Storage Capacity (Nom.)	42 gal.	160 L	79 gal.	300 L	116 gal.	440 L	174 gal.	660 L	
Tank"Off Peak" Capacity (Rated Deliv.)	35 gal.	133 L	66 gal.	250 L	97 gal.	367 L	132 gal.	500 L	
Dimensions – Total System Length Width Depth	53" 71" 21"	1350mm 1815mm 540mm	101" 71" 21"	2560 mm 1815 mm 540 mm	146" 71" 21"	3700 mm 1815 mm 540 mm	192" 71" 21"	4875 mm 1815 mm 540 mm	
Maximum Operating Pressure	IO2 psi	700 kPA	IO2 psi	700 kPA	IO2 psi	700 kPA	IO2 psi	700 kPA	
Booster Element (Electric) 240 V		3.6kW		3.6kW		4.8kW		4.8kW	
Weight — Empty — Full	44 lb. 396 lb.	20 kg 180 kg	92 lb. 752 lb.	42 kg 342 kg	132 lb. 1100 lb.	60 kg 500 kg	176 lb. 1496 lb.	80 kg 680 kg	
Recommended Number of Solapaks				2		3		4	
Total System Weight — Full	484 lb.	220kg	928 lb.	422 kg	1364 lb.	620kg	1840 lb.	836 kg	

Solar Panels

SPECIFICATIONS	Surface Area	Length	Width	Depth	Wei Full	ght Empty
Solapak I50 U.S.	16 sq. ft.	46"	52"	3"	84 lb.	, 72 lb.
Metric	1.5 m²	1175 mm	1330mm	75 mm	38.5 kg	36 kg

DISTRIBUTED BY: